BRUHAT BANGALORE MAHANAGARA PALIKE

YELAHANKA ZONE

Name of work: Estimate for Construction of Yoga and Meditation Building near Hopcoms at Vidyaranyapura in Ward No. 09 (Change of Place to Construction of Library Building at HMT Layout 1st Block in Ward No. 09, Vidyaranyapura Sub Division (Phase - 3).

							Estimate Cost Rs.		1000000.00
Sl No	Description of item	Unit	No	L	B	D	Qty	Rate	Amount
1	Providing and laying pattern flooring **for staircase treads and risers using the combination of 20mm thick ruby red granite** @66%,22m thick grey granite @20%,20mm thick shiva goldgranite 7%,20 mm thick black granite 7%.The Granite materials are laid on exsiting bed of CM 1:3 20mm thick pointed withcolour pigment. including full rounding for nosing, flaming the rubygranite for 50mm wide curing etc., complete(P. 93/14.46)	**sqm**							
	steps -Treads		20	1.3	0.30		7.80		
			2	1.3	1.30		3.38		
	Rises		21	1.35	0.15		4.25		
	Basic Rate	4909.00					**15.43**	5203.54	**80304.00**
	Area Weightage @ 6%	294.54							
	Total	**5203.54**							
2	**Providing and fixing of wall cladding 20mm thick gangswa water cut gold granite**, grey granite in CM 1:3Proporation cut to required shape, pattern with paper joints, finished with cement mortar using white cement and colourpigments to match the colour of slab making through jointing with sealan, making holes 25mm x12mm groves in joints including curing etc., complete **(P.117 / I.14.49) PWD SR 2013-14**								
	Verandah	**sqm**	1	5.30		1.00	5.30		
			2	1.40		1.00	2.80		
	Stair case		1	10.00		1.00	10.00		
	Basic Rate	4082.00					18.10	4326.92	**78317.00**
	Area Weightage @ 6%	244.92							
	Total	4326.92							
3	KSRB14-17.2: **Providing skirting dodo, rises of steps with colour glazed tiles 20x20** cms 6mm thick on 10mm thickcement plaster 1:3 and joint with white cement surry over rough plaster surface (excluding cost of rough plastered surfacewhich should be measured and paid separately) using glazedtiles of approved make and size including cost of materials, labour complete as per specifications. Specification No. KBS14,16,14,17 (P.116/ It 14.41.1)								
	Toilet Dado	sqm	3	5.40	2.10		34.02		
	Toilet flooring		3	1.50	1.20		5.40		
							39.42	890.00	**35084.00**

Sl No	Description of item	Unit	No	L	B	D	Qty	Rate	Amount
4	KSRB 9-4.2: **Providing Honne wood frames of doors,** windows, cleretory windows, ventilators and other frames, wrought framed or assembled including making plaster groves (excluding cost of cement concrete and side clamps) but including cost of materials, labour, HOM of machineries complete as per specification. Specification No. KBS 9.33 **(P.56/ It 9.4.2)**	Sqm							
	Main door		1	8.5	0.10	0.15	0.13		
			1	6.6	0.10	0.15	0.10		
			2	6.2	0.08	0.15	0.14		
			2	5.1	0.08	0.15	0.12		
	Basic Rate	99487.00					0.49	105456.22	**51505.00**
	Area Weightage @ 6%	5969.22							
	Total	**105456.22**							
5	KSRB 9-9.1: Providing and fixing in position **fully panelled Mathi/nandi wood shutters for doors,** styles and rails of 40mm, thick with bottom and lock rails 180mm wide top rail and styles 100mm wide as per drawing and panels of 25mm thick, including cost of materials, labour, HOM of machineries complete as per specifications, (excluding cost of fixtures) Specification No. KBS 9.34 **(P.57/9.16)**	sqm							
	Main Door		1	2.00		2.10	4.20		
	D1		1	1.20		2.10	2.52		
	D2		2	0.90		2.10	3.78		
	D3		3	0.75		2.10	4.73		
							15.23	3725.90	**56727.00**
	Basic Rate	3515.00							
	Area Weightage @ 6%	210.90							
	Total	**3725.90**							

Sl No	Description of item	Unit	No	L	B	D	Qty	Rate	Amount
6	KSRB 7.10 : Providing and fixing in position anodized aluminium windows and ventilators as per approved drawings with sliding shutters using double track window frame section of size 61.85x31.75mm. with 1.2mm thick bottom section weight 0.695 Kg/m, sides and top sections 1.3 mm. thick weight 0.659 kg/m; and shutter comprising top and bottom section of size 40mmx18mm, 1.25mm thick 0.417 kg/m, shutter outer side 40mmx18mm, 1.25mm, thick, weight 0.417 kg/m, shutter interlock section 40mmx26.7mm, 1.1mm thick, weight 0.469 kg/m the shutters mounted on nylon rollers with approved quality of fixtures such as aluminium handles tower bolts etc ; and providing and fixing 5.5mm, thick plain glass for shutters fitted with rubber beading aluminium section anodised 12 to 15 microns, including cutting to required length, joints mitred subdividing the frame tenonned and riveted in the assembled frame stiffened with end clops at corners angles etc., and fixed to the walls, lintels, floor beams/cills as the case may be with necessary steel screws, raul plugs, or teak wood gatties including cutting masonry or concrete and making good the original surface using cement mortar, aluminium sections retreated for removal of any rust and protection of further rust formation and coated with the greasy materials, for non-adhesion of mortar	**sqm**							
	W		23	1.50		1.80	62.10		
			2	0.90		0.60	1.08		
							63.18	3726.96	**235469.00**
	Basic Rate	3516.00							
	Area Weightage @ 6%	210.96							
	Total	**3726.96**							
7	KSRB 7.9 : **Providing and fixing M.S.grill work** for windows and ventilators weighing 21kg/sqm using M.S. flats, or M.S.square rods, or combination of M.S. flats and square rods as per approved design, drawning including cutting steel sections and welding the same to required pattern with a coat of red lead primer, cost of materials, fixtures, labour and HOM of machinery complete as per specifications. Specification No. KBS 7.12 **PWD SR 2013-14 (P.37 / I.7.9)**	Kgs							
	For Windows		23	1.50		1.80	62.10		
	Ventilator		3	0.90		0.60	1.62		
							63.72		
	Weight /Sqm = 21 Kgs i.e 10.17 x 21= 213.57 Kgs		21	63.72			**1338.12**	95.40	**127657.00**
	Basic Rate	90.00							
	Area Weightage @ 6%	5.40							
	Total	**95.40**							

Sl No	Description of item	Unit	No	L	B	D	Qty	Rate	Amount
8	KSRB 15-14.1 : **Providing and applying two coats with oil bound washable stemper** cf approved brand and shade on wall surface including priming coat with distemper primer after thoroughly brooming the surface free from mortar drops and other foregin matter including preparing the surface even and sand paper smooth, cost of materials, labours, complete as per specifications **PWD SR 2013-14 Page No. 124 / Item No. 15.49**	Sqm							
	For ceiling		1	24.30	15.10		366.93		
	Verandah		1	8.80	4.50		39.60		
	Stair room FF		1	3.50	4.50		15.75		
	Inside wall Hall		2	24.30		3.15	153.09		
			4	15.10		3.15	190.26		
			2	6.90		3.15	43.47		
			2	5.00		3.15	31.50		
			2	2.50		3.15	15.75		
							856.35		
	Deductions - For door Doors		1x0.5	2.00		2.10	2.10		
			1x0.5	1.2.		2.10	1.26		
			2	0.90		2.10	3.78		
			2	0.75		2.10	3.15		
	Windows		23x0.5	1.50		1.35	23.29		
							33.58		
							822.77	59.36	**48840.00**
	Basic Rate	56.00							
	Area Weightage @ 6%	3.36							
	Total	**59.36**							
9	KSRB 15-16.1: providing and finishing **external walls in two coats with water proof cement paint** of approve brand and shade to give an even shade after thourghly brooming the surface to remove all dirt and losse powdered material, free from mortar dops and other foreign matter cost of materials, labours, complete as per specifications **PWD SR 2013-14 (P.127 / I.15.53.2) with Primer**	Cum							
	Out Side		2	24.70		4.20	207.48		
			2	15.50		4.20	130.20		
			1	12.10		3.00	36.30		
							373.98		
	Deductions - For door Doors		1x0.5	2.00		2.10	2.10		
			1x0.5	1.20		2.10	1.26		
	Windows		23x0.5	1.50		1.80	31.05		
							34.41		
							339.57	78.44	**26636.00**
	Basic Rate	74.00							
	Area Weightage @ 6%	4.44							
	Total	**78.44**							

Sl No	Description of item	Unit	No	L	B	D	Qty	Rate	Amount
10	KSRB: 7.1 Providing and fixing in position collapsible steel stutters with single or double [redacted]af with vertical channel 20mmx10mmx2mm braced with flat iron diagonals 20mmx5mm size, with top and bottom rails of T iron sections of 40x40x6 mm with 38mm dia steel pulleys complete with bolt and nuts, locking arrangements, stoppers, handles on both sides with 7.5 cms openings at 10 cms. c to c applying a priming coat of re lead paint, cost of materials, labour, HOM of machinery complete as per specifications. Size of gate 2.4mx1.4m Specification NO, KBS 7.7 / 7.12 **Page No. 36 / Item No. 7.1 / PWD SR 2013-14**	Sqm							
			1	1.40	2.70		**3.78**	4306.78	**16280.00**
	Basic Rate	4063.00							
	Area Weightage @ 6%	243.78							
	Total	**4306.78**							
11	KSRB 8.6-7: Providing and fixing in wall surface 4 kg/sq.cm **H.D.P.E. rain down water pipes 90 mm** outer dia approved make and brand with necessary specials like shoes bends and offsets fixed with iron clamps, walls plugs, screws, including cost of materials, labour, complete as per specifications. **Page No. 52/ Item No. 8.18 / PWD SR 2013-14**	m							
			10	4.00			**40.00**	447.32	**17893.00**
	Basic Rate	422.00							
	Area Weightage @ 6%	25.32							
	Total	**447.32**							
12	KSRB 11.11.1 : Providing and fixing white vitreous china clay, flat back wash basin of size 630x450mm with pair of 15mm C.P brass pillar taps with C.I./M.S. brackets, 32mm C.P. brass waste of standard pattern, painting of fitting and brackets ,cutting and making good the wall and floor wherever required, including cost of materials, labour complete as per specifications. Specification No. KBS 11. **Page No. 82 / Item No. 12.23 PWD SR 2013-14**	Unit							
			3				**3.00**	3773.60	**11321.00**
	Basic Rate	3560.00							
	Area Weightage @ 6%	213.60							
	Total	**3773.60**							

Sl No	Description of item	Unit	No	L	B	D	Qty	Rate	Amount
13	KSRB 11-5 : Providing and fixing white vitreous china clay, water closet European type (Pedestal Type) with black solid plastic seat and lid, C. P. brass hinges, rubber buffers. 10 litre low level, P.V.C. flushing cistern (all are approved make) with fittings, C.I. / M.S. brackets, 40mm diameter flush bend with fittings and clamps, overflow arrangements with specials and 25mm mosquito proof coupling of approved design, painting of fittings and brackets, cutting and making good the wall and floor wherever required, including cost of materials, labours complete as per specifications. KBS 11 Specification No. KBS 11 **Page No. 79 / Item No. 12.5 PWD SR 2013-14**	Each							
			3				**3.00**	5148.42	**15445.00**
	Basic Rate	4857.00							
	Area Weightage @ 6%	291.42							
	Total	**5148.42**							
14	KSRB :13-8.3 : Providing and fixing to wall, ceiling and floor, low density poluethylene pipes kgs/sq.cm working pressure **32mm** outside diameter, compression type fittings, wall clips, making good the wall ceiling and floor cost of materials, labour charges HOM of equipments and testing exeluding cost of fittings,complete as per specifications Specification No KBS 13.2.15.1/ 13.9/**(Page No.100 / Item No. 13.68 PWD SR 2013-14**	Rmtr							
			1	150.00			**150.00**	186.56	**27984.00**
	Basic Rate	176.00							
	Area Weightage @ 6%	10.56							
	Total	**186.56**							
15	KSRB 13-1.4 : Providing and fixing to wall, ceiling and floor galvanised / mild steel tube 32mm dia nominal bore with fittings (medium grade weight 3.23 kg/mtr) **Page No. 94 / Item No. 13.4 / PWD SR 2013-14**	m							
			1	60.00			**60.00**	354.04	**21242.00**
	Basic Rate	334.00							
	Area Weightage @ 6%	20.04							
	Total	**354.04**							
.16	KSRB 13-6.3.5: Providing and fixing in position brass gate valve with C.I. wheel of approved quality (screwed end) 32mm nominal bore including cost of all materials, labour and HOM of equipments with all leads complete as per specifications. Specification No. KBS 13.2.6 / 13.3 **Page No. 98 / Item No. 13.35 / PWD SR 2013-14**	Each							
			1	8.00			**8.00**	997.46	**7980.00**
	Basic Rate	941.00							
	Area Weightage @ 6%	56.46							
	Total	**997.46**							

Sl No	Description of item	Unit	No	L	B	D	Qty	Rate	Amount
17	KSRB 13-6.6.1: Providing and fixing unplasticised PVC connection pipe with brass union 15mm nominal bore 300 mm length of PVC connection including cost of all materials, labour and HOM of equipments with all leads complete as per specifications. **Page No. 100 / Item No. 13.60 / PWD SR 2013-14**	Set							
			1	15.00			**15.00**	888.28	**13324.00**
	Basic Rate	838.00							
	Area Weightage @ 6%	50.28							
	Total	**888.28**							
18	KSRB 13-6.1.2 : Providing and fixing in position brass bib cock of approved quality 20mm nominal bore including cost of all materials, labour and HOM of equipments with all leads complete as per specifications. Specification NO. KBS 13.2.2 / 13.3, **Page No. 96 / Item No. 13.24 / PWD SR 2013-14**	Each							
			20				**20**	192.44	**3849.00**
	Basic Rate	241.00							
	Area Weightage @ 6%	14.46							
	Total	**255.46**							
19	Supppying water storage tanks made of virgin polymer (LLDPE) with two layers outer black of blue and inner white layer of approved quality and make, conforming to ISI / ISO / SSI specifications, **No. 273 / Item No. 37.58 PWD SR 2013-14**	L							
			1	1500			**1500**	6.36	**9540.00**
	Basic Rate	6.00							
	Area Weightage @ 6%	0.36							
	Total	**6.36**							
	PART - 3 ELECTRICAL AND FITTINGS								
20	Supplying ... dia 2mm/2.5mm thick heavy gauage PVC Conduit Pipe with bends metal junction boxes adhesive paste etc., and bracing U or J hooks and cement plastering up to the surface of the brick level and run with 18 SWG GI fish wire run through out the conduit wherever necessary KPWD SR 2010-11 (P-2,I-3)	Mtrs							
	32 mm dia 2.5mm thick		1	100.00			**100.00**	68.00	**6800.00**
21	Supplying and flush mounting teak wooden box with out front plank made of not less than 12mm thick wood after due groove cutting necessary masonry patch work complete. KPWD SR 2010-11 (P-3, I-6)	Each							
	10"X7"X3" (300X228X76mm)		4				**4**	68.00	**272.00**
	8"X6"X3" (300X228X76mm)		4				**4**	52.00	**208.00**
22	Supplying and fixing PVC/metal conduit accessories special type Junction Box (I. 5/P. 3) KPWD SR 2010-11	Each							
	32 mm Junction Box		15				**15**	29.00	**435.00**
	Deep 32 mm Junction Box		8				**8**	33.00	**264.00**
	Fan Box 18 /SWG		8				**8**	57.00	**456.00**

Sl No	Description of item	Unit	No	L	B	D	Qty	Rate	Amount
23	Point Wiring using copper wire with switch Supplying and wiring adopting loop system existing PVC Conduit / casing caping using Copper PVC insulated multi strand 2x1.5 Sqmm copper wire with a 6 Amps flush type SP control switch shall be fixed on the existing plastic sheet gang box the other end of the wires shall be terminated with sufficient loose length in a wood PVC round block complete for each outlet KPWD SR 2010-11 (P.3/I.8)	Each							
	Point Wiring using Class A Materials								
	a) Short point upto 3Mtr from tapping point to out let via switch		10				10.00	175.00	**1750.00**
	b) Medium point above 3mtr upto 6mtr from tapping point to out let via switch		15				15.00	260.00	**3900.00**
	C) Long point above 6mtrs upto 10mtrs from tapping point to outlet via switch		15				15.00	368.00	**5520.00**
24	Supplying and fixing superior quality modula switch mounting polyorbonate plate with ncecessary supporting back plate with required nos. of machines screwes, bolts nuts etc., complete on the existing metal/PVC box KPWD SR 2010-11 (P-7, I-17)	Each							
	1 to 3 Modular		4				**4**	82.00	**328.00**
	8 Modular		8				**8**	175.00	**1400.00**
25	Supplying and fixing of modular switch / socket/Stepped electrical fan regulator / dimmer / telephone socket etc on existing modular switch plate KPWD SR 2010-11 (P.8/I.18)	Each							
	6Amps one way switch.		40				**40**	96.00	**3840.00**
	6Amps 3way Socket.		10				**10**	165.00	**1650.00**
	Stepped Fan Regulator		13				**13**	520.00	**6760.00**
26	Supplying Surface mounted type mirror optic luminaries for single/Twin 36/40 watts fluorscent lamps cross rising of stove enameled deep coloured M.S.Low profile housing complete with all accessories and high purity anodzed aluminum reflector assembling along with cross louvers including necessary fluorescent tubes with low loss open construction copper wound ferromagnetic ballast, starters etc., complete set (P.No. -17 Sl No -5)								
	Group 'A'	Each	16				**16**	1950.00	**31200.00**
27	Supplying capacitor type ceiling fan complete with down rod blades, shackle, canopies etc., for operation on 230 volts, 50 cycles. Single phase AC supply conforming to ISS-374-1979 and with double ball bearing system KPWD SR 2010-11 (P-23, I-23) Regulator Model (Khaitan, Crompton Geaves, Orient, Polar, Bajaj, Usha, Havells,	Each							
	56" Sweep (1400 mm)		13				**13**	1950.00	**25350.00**

Sl No	Description of item	Unit	No	L	B	D	Qty	Rate	Amount
28	Supplying and fixing 32Amps security and energy savings DP switch with key tag suitable to operate on 230 Volts 50Hz AC supply & completely wired on existing box KPWD SR 2010-11 (P.9/I.19)	Each							
	Group A		1				**1**	630.00	**630.00**
29	Supplying an fixing one of 230 volts PBBC bakelite staight or slant batten holder and wiring with in 60w/230 Volts lamps KPWD SR 2010-11 (P-13, I.2)	No							
			10				**10**	60.00	**600.00**
30	Supplying and fixing miniature circuit breakers on existing MCB distribution boards using necessary fixing materials and wiring complete as required 5-32 Amps SP KPWD SR 2010-11 (P.34/I.13)	Each							
			10				**10**	560.00	**5600.00**
31	Supply and fixing polished wood board made of not less than 15mm thick plank on both sides with planks made out of not more than 2 pieces and fixing the same to the wall using tapered inverted wooden plugs screws etc KPWD SR 2010-11 (P,32/I.2)								
	20"x20"x2.5"		2				**2**	285.00	**570.00**
32	Supplying and fixing of porcelain fuse channel with cut out on existing wooden /panel using necessary nuts, bolts and washers etc complete KPWD SR 2010-11 (P.30/I.3)								
	32 Amps		3				**3**	100.00	**300.00**
33	Supplying, fixing, wiring, earth electrode for grounding conduits, I.C cutouts and other equipment on the meter board using 40mm dia 2.90 thick GI pipe 2.5 mtr long buried in a pit.. The pit should be filled with equal proprotion of salt and charcol 150mm alround the pipe to complete depth. The connection from the pipe to the conduit etc, is to be established through GI wire of size as oer ISI specification 7.3.3 of Is 732 using 12mm dia nuts, washers and checknuts etc the pipe shall have 16 through holes of 122 mm dia KPWD SR 2010-11 (P.68/I.1)	No							
			2				**2**	1950.00	**3900.00**

Sl No	Description of item	Unit	No	L	B	D	Qty	Rate	Amount
34	INSULATED CABLE ON MESSENGER WIRE Using 2 single core wires for a single phas and 4 single core wies for 3 phase supplying and stringing PVC insulated and PVC sheathed 650/1100V class aluminium conductor of size supported by 3.15mm (10 SWG) GI messenger wire with two breaks insulators, one at each end of the span wit suspenders at intervals of 0.75m. Each suspender shall be of porcelain reel insulator of suitable core through which insulated wire passes (single core or twin core as the case may be) and this reel insulator shall be fixed to the messanger wire using 2mm (No. 14SWG) GI wire suitably bent and twisted. Separate reel insulated shall be provided for each wire the messanger wire shall be bed-ended on the clamp provided to the departmental pole wide item No. 4 above (Page No. 56 Item No. 5a) KPWD SR 2010-11 Item No. 65 / Page No. 5 c)	Mtr							
	c) 6 Sqmm		2	20.00			40.00	45.00	1800.00
35	Sub Total								988930.00
36	Bsecom deposit	L/S							10000.00
37	Miscesalaneous Charges								1070.00
								Total	1000000.00
	(Rupees Ten Lakhs Only)								

Technical Sanction
Ten Lakhs only
10.00 Lakhs
P1771
Registered to conduct
No:
AE/JE
Subject
No:225/14-15
31/10/14

CERTIFICATE

1 The work spot has been inspected and the work is found necessary.
2 This estimate is prepared as per PWD SR of 2013-14 & KPWD 2010-11.
3 The provisions were made in this estimate are necessary and adequate.
4 This works come under B.B.M.P. limits.

Assistant Engineer
W-09

Assistant Executive Engineer
Bruhat Bangalore Mahanagara Palike
Vidyaranyapura Sub Division

Executive Engineer
Bruhat Bangalore Mahanagara Palike
Byatarayanapura Division

BRUHAT BANGALORE MAHANAGARA PALIKE

YELAHANKA ZONE, BYATARAYANAPURA DIVISION

Lead Statement for Srinivaspura Dumping Yard for Ward No. 09, Vidyaranyapura Sub Division.

Lead Distance

1.	From BBMP Sub Division office to Devi Circle	1.50 Kms
2.	From Devi Circle to Thirumala Daba	2.00 Kms
3.	From Thirumala Daba to 3rd Cross SBI Bank	2.00 Kms
4.	From 3rd Cross SBI Bank to Sheshadripuram College	0.50 Kms
5.	From Shesadripuram College to Police Station	0.80 Kms
6.	From Police Station to Kogilu Cross	0.60 Kms
7.	From Kogilu Cross to Srinivasapura	4.00 Kms
8.	From Srinivasapura to Dumping Yard	0.50 Kms
	Total	**11.90 Kms**

Certificate:

1. Certified that the Srinivasapura Dumping Yard us the approved dumping yard for ward no. 09 BBMP
2. BBMP Sub Division office Vidyaranyapura is taken as the centre place for calculating the lead distance for ward no. 09.
3. The above distance is the shortest distance for calculating the lead.

Assistant Engineer Ward No. 09	Assistant Executive Engineer Vidyaranyapura Sub Division	Executive Engineer Byatarayanapura Division

Name of work:- Construction of Library Building at HMT 1st Block in W.d No. 05 (Phase III)

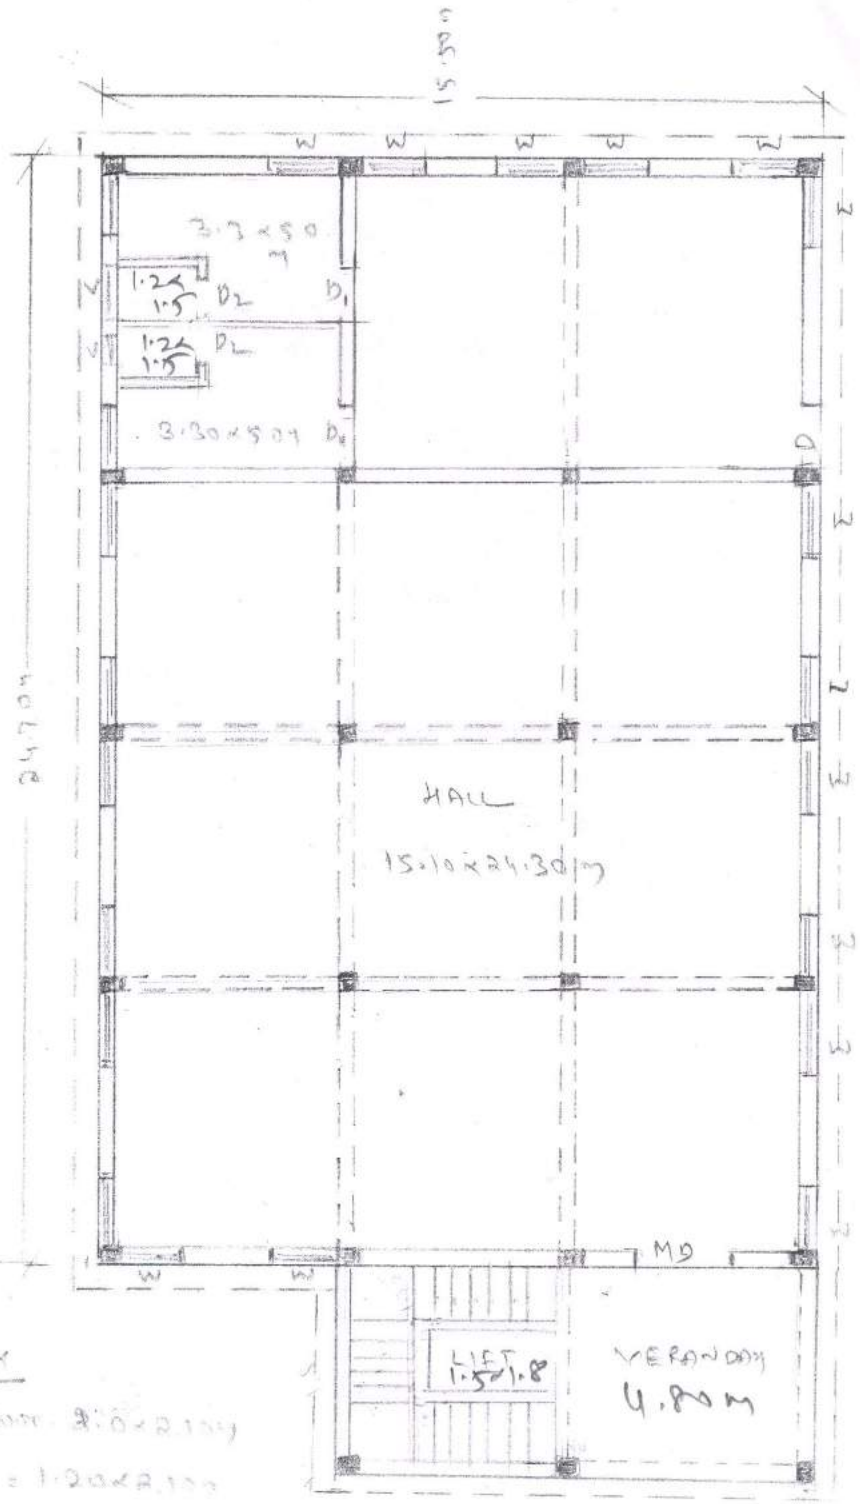

INDEX

MD = Main Door 2.0×2.1m

D = Door = 1.20×2.1m

D_1 = Door = 0.90×2.1m

D_2 = Door = 0.75×2.1m

W = Window 1.0×1.80m

V = Ventilator 0.90×0.60m

PLAN

ಸಹಾಯಕ ಕಾರ್ಯಪಾಲಕ ಅಭಿಯಂತರರು.
ವಿದ್ಯಾರಣ್ಯಪುರ ಉಪ ವಿಭಾಗ,
ಯಲಹಂಕ ಪಲುರು,
ಬೃ. ಬೆಂ. ಮ. ಸಾ. ಬೆಂಗಳೂರು-97.

LEAD CHART FOR DUMPING YARD FOR WARD NO 09

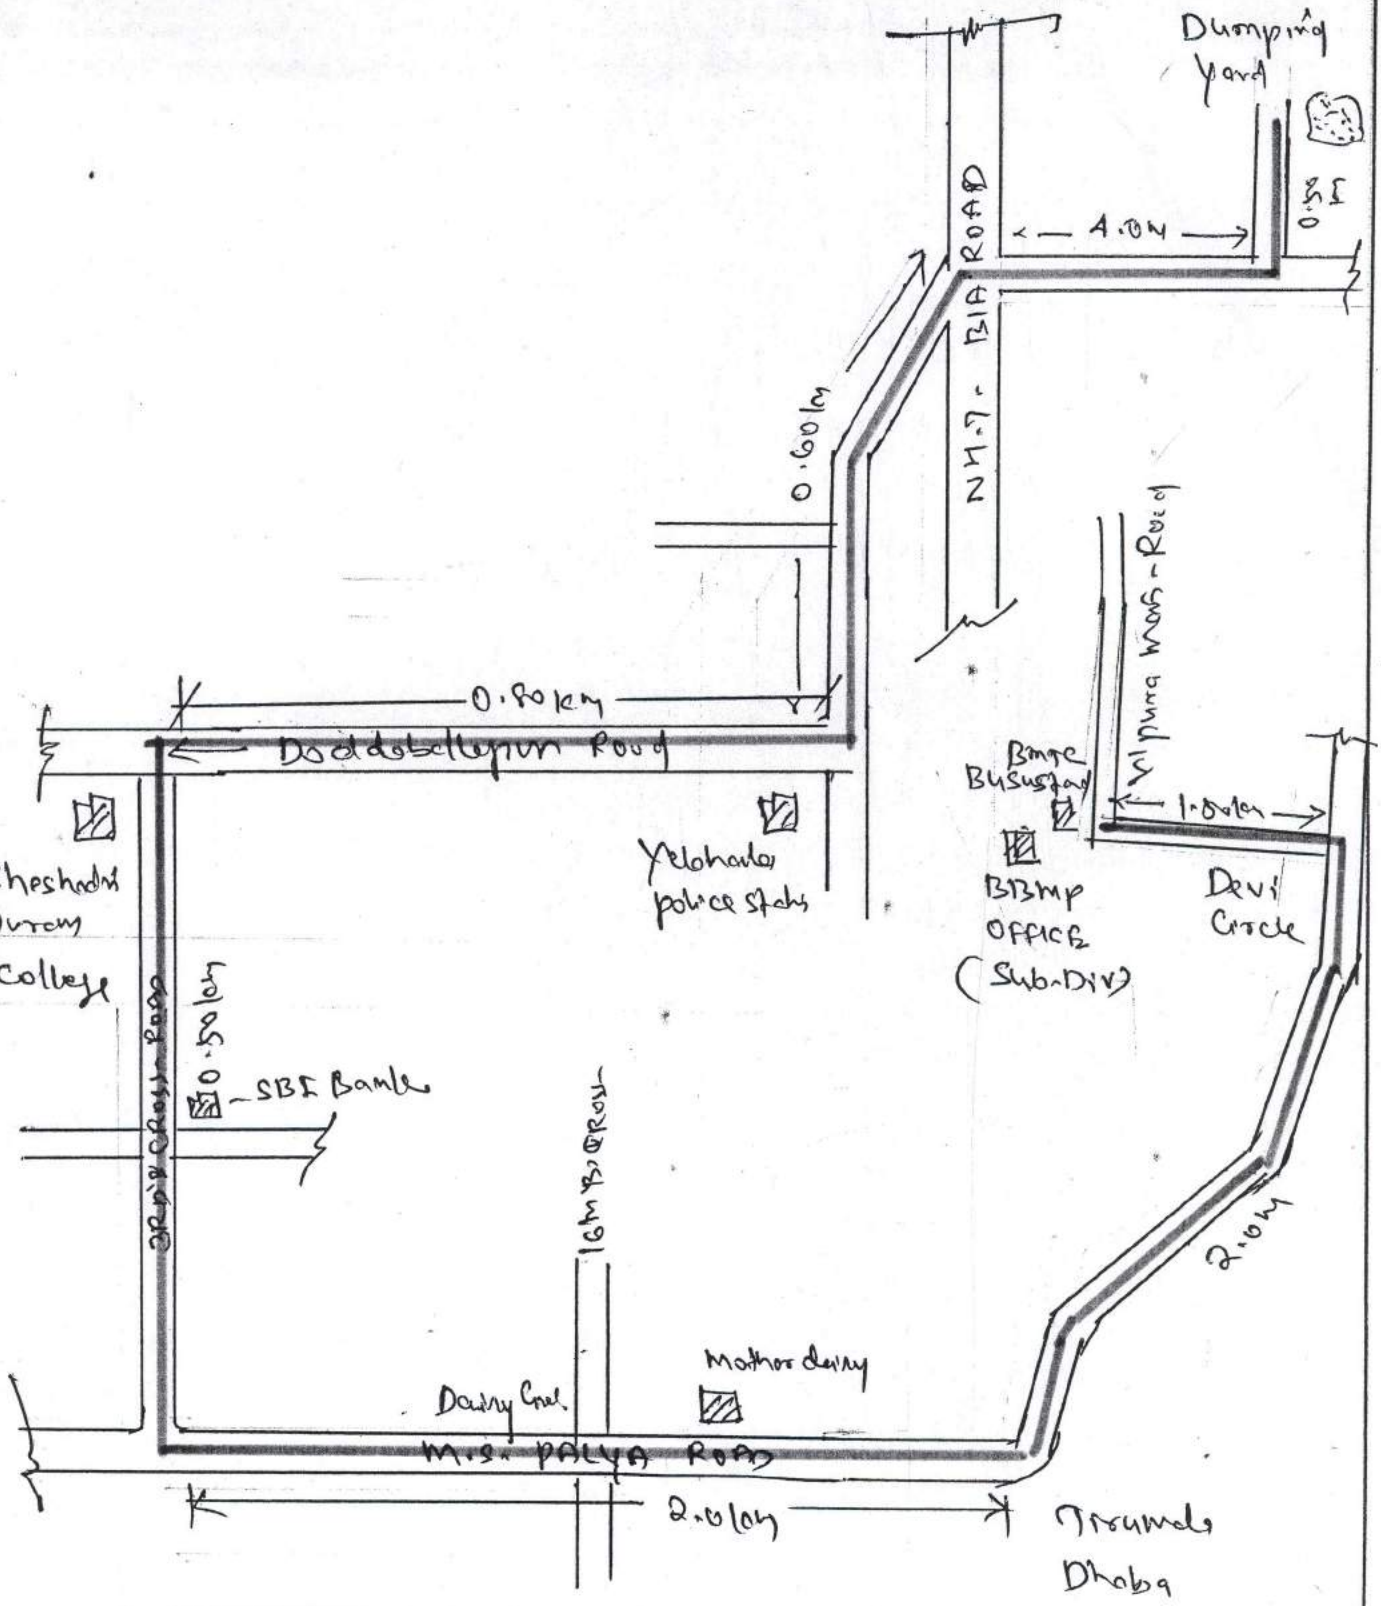

ಸಹಾಯಕ ಕಾರ್ಯಪಾಲಕ ಅಭಿಯಂತರರು.
ವಿದ್ಯಾರಣ್ಯಪುರ ಉಪ ವಿಭಾಗ.
ಯಲಹಂಕ ವಲಯ,
ಬೃ. ಬೆಂ. ಮ. ಪಾ., ಬೆಂಗಳೂರು-97

Construction of Yoga and Meditation Building near Hopcoms at Vidyaranyapura in Ward No. 09 (Change of Place to Construction of Library Building at HMT Layout 1st Block in Ward No. 09, Vidyaranyapura Sub Division (Phase - 3).

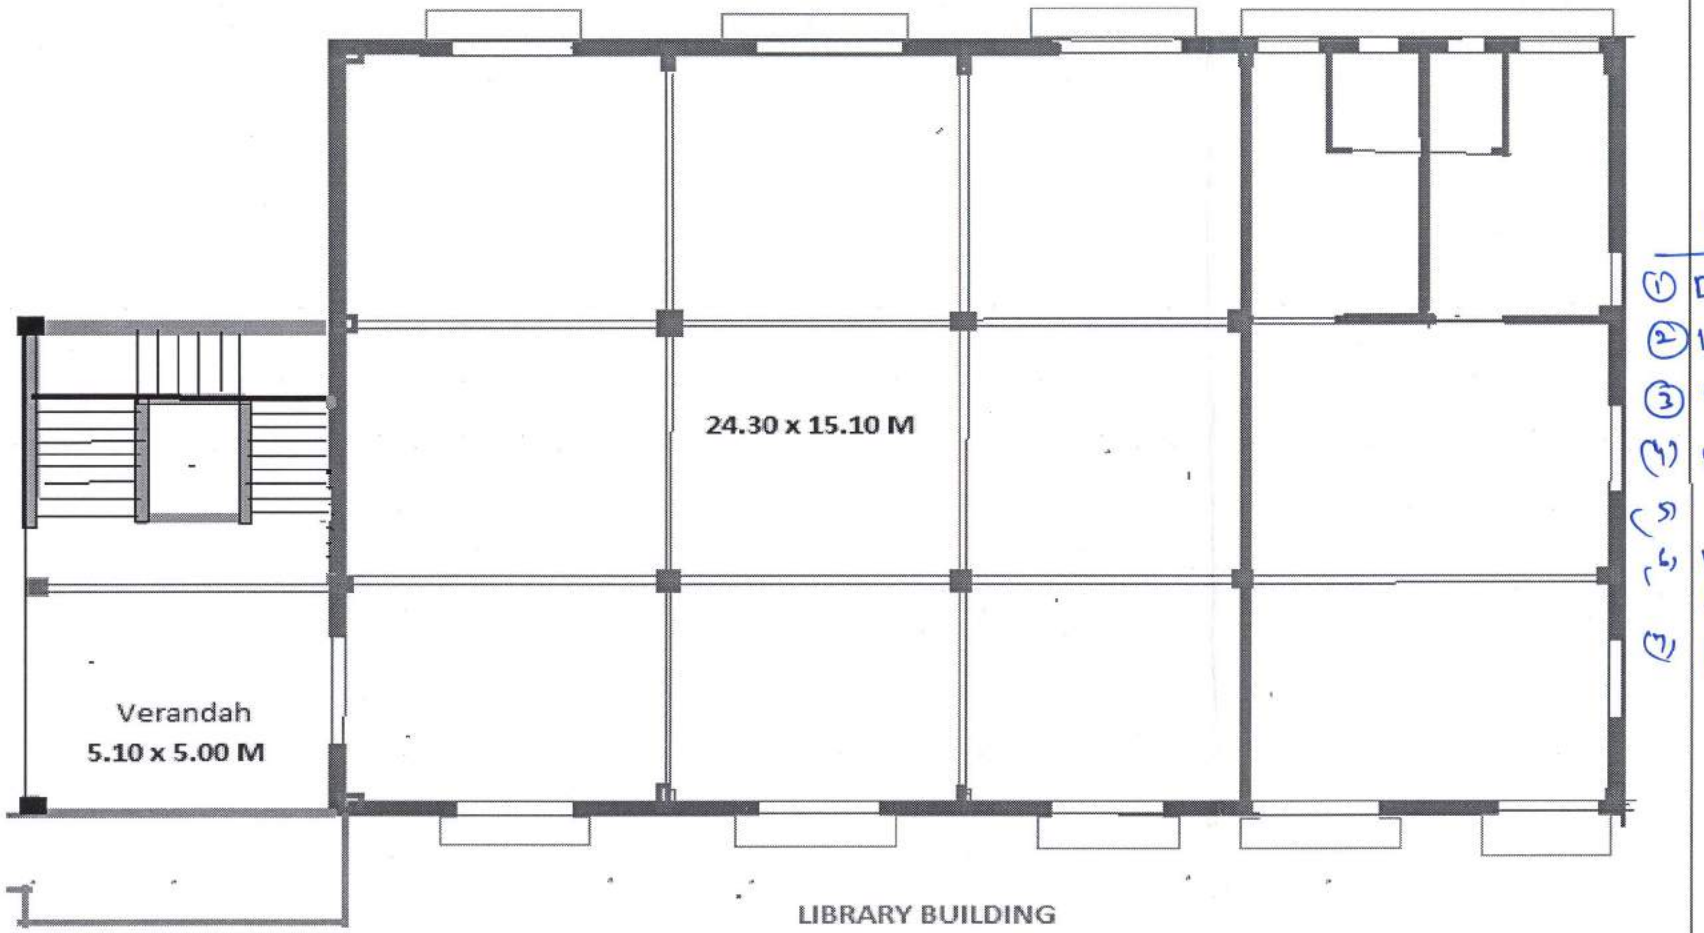

Note

(1) Door
(2) Windows
(3) Electrical Items
(4) Wall Cladding
(5) Skirting
(6) M.S. Grill for Windows
(7) Painting work

Executed

Assistant Executive Engineer
Vidyaranyapura Sub Division
BBMP, Bangalore - 97

Sketch Showing the location of Construction of Yoga and Meditation Building near Hopcoms at Vidyaranyapura in Ward No. 09 (Change of Place to Construction of Library Building at HMT Layout 1st Block in Ward No. 09, Vidyaranyapura Sub Division (Phase - 3).

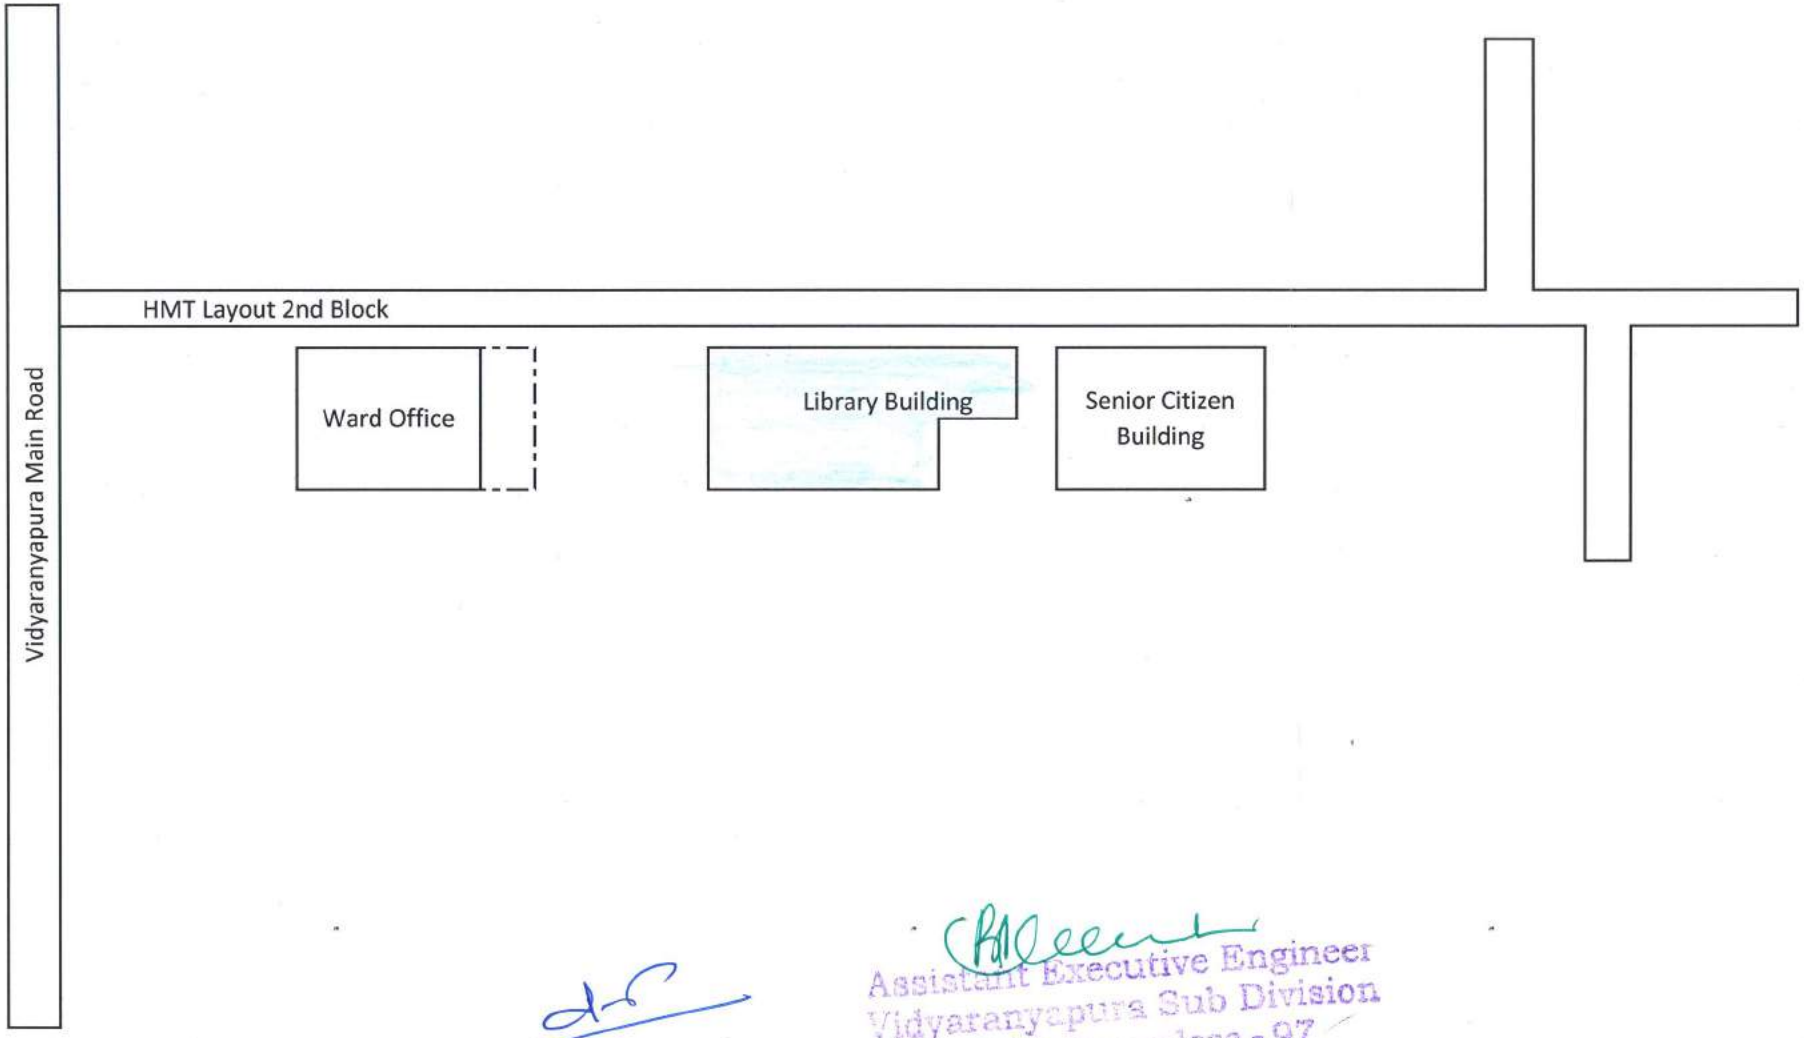

Assistant Executive Engineer
Vidyaranyapura Sub Division
BBMP, Bangalore - 97